

# DEUBLIN



## 1114 Series "AutoSense" Rotor-Mounted Rotating Unions for Coolant and Air Service and Dry Running

- Single passage for both coolant and dry air
- Patent-pending "AutoSense" technology automatically changes between closed seals and controlled leakage operation in response to the kind of media
- Dual ABEC 7 (ISO class P4) angular contact ball bearings
- Threaded rotor for easy installation
- Full-flow design has no obstructions to trap swarf or debris
- Labyrinth system and large vents to protect bearings
- Balanced mechanical seals made from silicon carbide for long life even under difficult operating conditions
- Aluminium housing, endcap anodised resists corrosion



### Operating Data

Media	Water-based Coolant MQL (oil mist) up to 10 bar (145 psi) Air up to 10 bar (145 psi)		
Filtration	ISO 4406 Class 17/15/12, max. 60 micron		
Max. Speed	22.000 min <sup>-1</sup> 22,000 rpm		
Max. Pressure	see chart		
Max. Flow	82 l/min	21.6 gpm	Standard
	24,3 l/min	6.4 gpm	High Pressure
Max. Temperature	70°C	160°F	

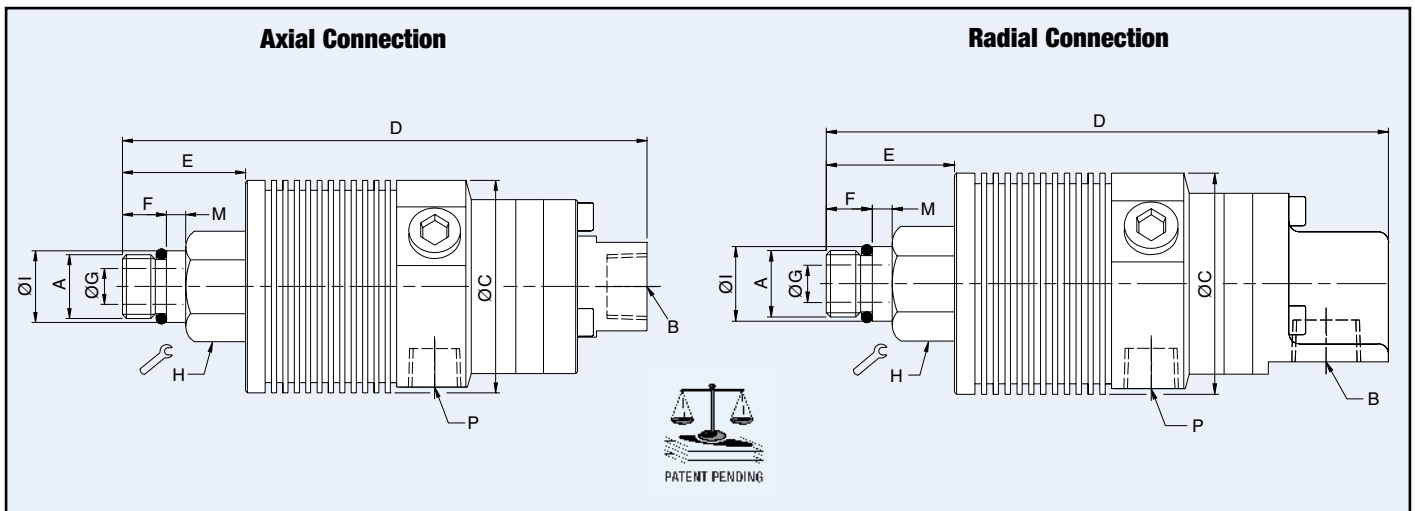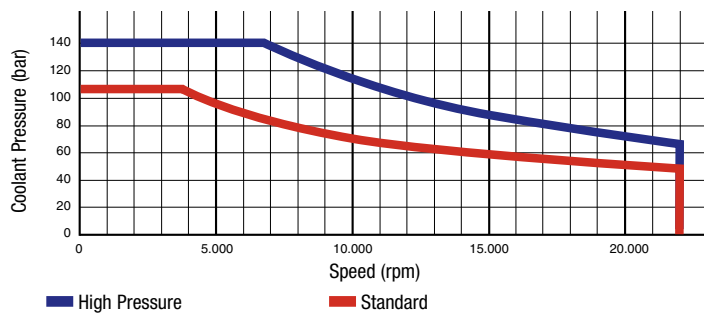

	Ordering Number	B Supply Connection	C Overall Diameter	D Overall Length	P Vent Size Ø (3 x 120°)	A Rotor Connection	E Rotor Length	F Thread Length	G Bore Diameter	H Across Flats	I Pilot Diameter	M Pilot Length
Standard	1114-011-165	3/8 NPT Axial	53	134	1/4 NPT	5/8-18 UNF LH	34	14	9	15/16"	0.6555" / 0.6553"	5
	1114-021-188	G 3/8 Axial	53	131	G 1/4	M16 x 1.5 LH	31	11	9	24	17.993 / 17.988	5
	1114-041-188	3/8 PT Axial	53	131	1/4 PT	M16 x 1.5 LH	31	11	9	24	17.993 / 17.988	5
	1114-010-165	3/8 NPT Radial	53	140	1/4 NPT	5/8-18 UNF LH	34	14	9	15/16"	0.6555" / 0.6553"	5
	1114-020-188	G 3/8 Radial	53	137	G 1/4	M16 x 1.5 LH	31	11	9	24	17.993 / 17.988	5
	1114-040-188	3/8 PT Radial	53	137	1/4 PT	M16 x 1.5 LH	31	11	9	24	17.993 / 17.988	5
High Pressure	1114-014-196	1/4 NPT Axial	53	134	1/4 NPT	5/8-18 UNF LH	34	14	9	15/16"	0.6555" / 0.6553"	5
	1114-024-212	G 3/8 Axial	53	131	G 1/4	M16 x 1.5 LH	31	11	9	24	17.993 / 17.988	5
	1114-044-212	1/4 PT Axial	53	131	1/4 PT	M16 x 1.5 LH	31	11	9	24	17.993 / 17.988	5
	1114-013-196	1/4 NPT Radial	53	140	1/4 NPT	5/8-18 UNF LH	34	14	9	15/16"	0.6555" / 0.6553"	5
	1114-023-212	G 1/4 Radial	53	137	G 1/4	M16 x 1.5 LH	31	11	9	24	17.993 / 17.988	5
	1114-043-212	1/4 PT Radial	53	137	1/4 PT	M16 x 1.5 LH	31	11	9	24	17.993 / 17.988	5

# DEUBLIN


## 1114 Series "AutoSense" Bore-Mounted Rotating Unions for Coolant and Air Service and Dry Running

- Single passage for both coolant and dry air
- Patent-pending "AutoSense" technology automatically changes between closed seals and controlled leakage operation in response to the kind of media
- Bore-mounted design for easy installation
- Accepts up to 19 mm of axial drawbar movement
- Matched, ISO class P4 hybrid ball bearings for smooth operation at high speeds
- Labyrinth system and large vents to protect ball bearings
- Full-flow design has no obstructions to trap swarf or debris
- Balanced mechanical seals made from silicon carbide for long life even under difficult operating conditions
- Anodised aluminium and stainless steel parts resist corrosion




### Operating Data

Media	Water-based Coolant MQL (oil mist) up to 10 bar (145 psi) Air up to 10 bar (145 psi)		
Filtration	ISO 4406 Class 17/15/12, max. 60 micron		
Max. Speed	see chart/table		
Max. Pressure	see chart/table		
Max. Flow			
1114-710-717	82 l/min	21.6 gpm	
1114-92x-930	24,3 l/min	6.4 gpm	
Max. Temperature	70°C	160°F	

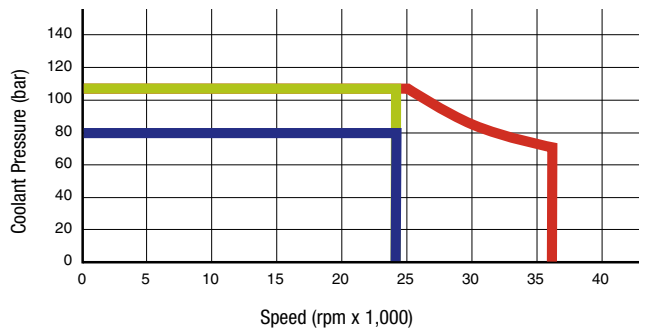

■ 1114-928-930, 1114-929-930   ■ 1114-710-717   ■ 1114-926-930, 1114-927-930

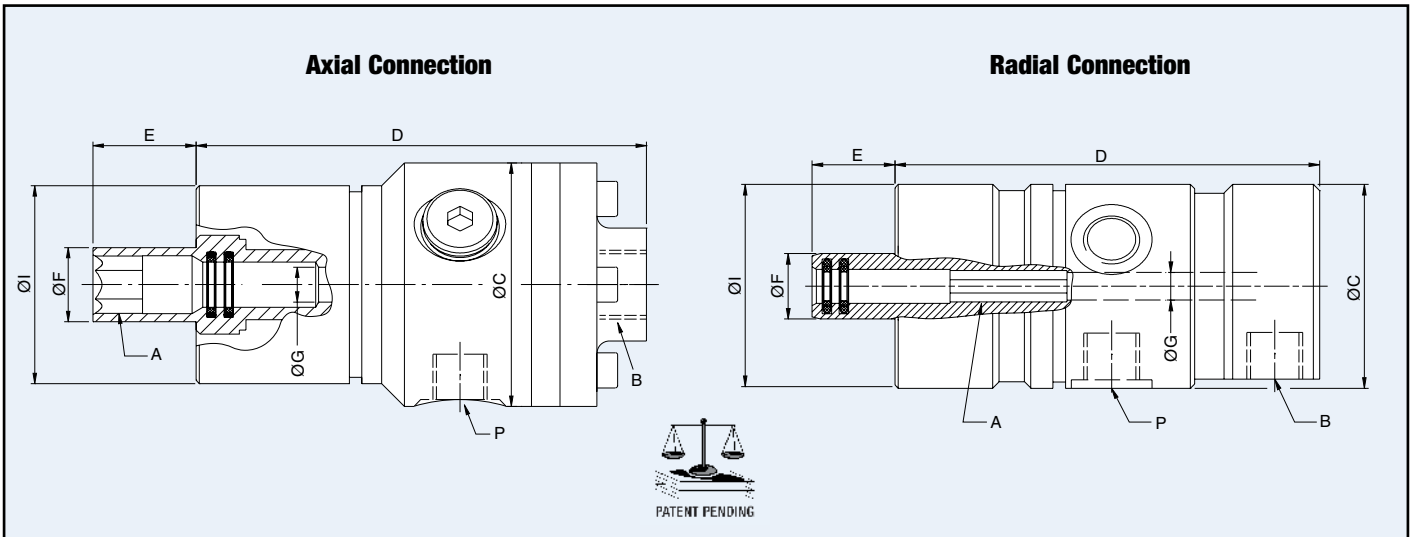

	Ordering Number	B Supply Connection	C Overall Diameter	D Housing Length	P Vent Size $\varnothing$ (3 x 120°)	A Rotor Connection	E Rotor Length	F Rotor Overall Diameter	G Bore Diameter	I Pilot Diameter	Max. Speed (rpm)	Max. Pressure (bar)
Axial	1114-710-717	G 3/8	59	111	G 1/4	Hexagon 12 D10	25	18	11 h7	48 g6	24,000	80
	1114-927-930	G 1/4	48	95	G 1/4	Octagon 7.4 D10	19.5	15.4	8.1 f9	48 h7	36,000	105
	1114-929-930	G 1/4	48	95	G 1/4	Octagon 7.4 D10	19.5	15.4	8.1 f9	48 h7	24,000	105
Radial	1114-926-930	G 1/4	48	95	G 1/4	Octagon 7.4 D10	19.5	15.4	8.1 f9	48 h7	36,000	105
	1114-928-930	G 1/4	48	95	G 1/4	Octagon 7.4 D10	19.5	15.4	8.1 f9	48 h7	24,000	105

This series includes additional models.  
Contact DEUBLIN at ☎ +49 (0) 6122-8002-0 or info@deublin.de